



ACTA L53



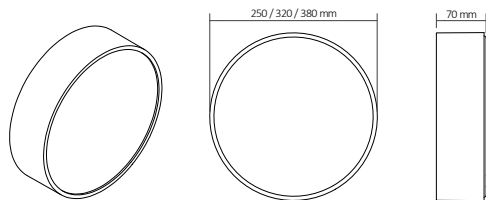

---

## ACTA L53 - WALL/CEILING

**Design:** Friis & Moltke Design A/S

### Light distribution

Rotationally symmetrical distribution of light

### Materials

Fitting head in anodized black aluminium, powder coated white inside. Pole in anodized black aluminium

### Optics

Lamp cover in shockproof polycarbonate opal satiné

### Height

3500 mm / 4000 mm

### Light source data

LED type: Bridgelux VERO SE series Gen7  
Operational life: Min. 100.000 hours at ta max 25° C.  
L80B10  
Total consumption: 30W v/750mA  
Colour temperature: 3000K, 4000K  
Colour rendering: CRI >80  
Colour accuracy: 3 steps SDCM  
Luminous efficacy: 122 Lm/W

### Driver data

Driver type: Philips Xitanium  
Operational life: Min. 100.000 hours  
Surge protection: >10 kV  
Dimming: Dynadimmer, 1-10V. Option for DALI

### Installation

For casting. Earth spike is included

### Connection

3 cables max 5 x 10 mm<sup>2</sup>. Connection box and fuse are included

### CE

Classification: IP44. IK08. Insulation safety class II  
Weight 40 / 45 kg.