


COVER L303



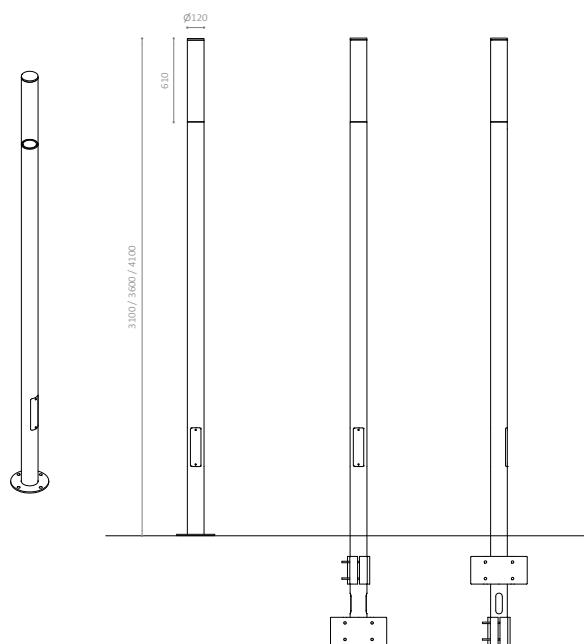

## COVER L303 - POST LIGHT

DESIGN: LUPLAU POULSEN ARKITEKTER

### LIGHT DISTRIBUTION

Indirect and rotationally symmetrical light distribution

### MATERIALS

**Lamp housing:** Lamp housing in mold cast aluminum. Top lid in powder-coated aluminum. Reflector in anodised aluminum.

**Shade:** Clear, impact resistant acrylic. UV resistant.

**Post:** Hot-dip galvanised steel or powder coated, hot-dip galvanised steel.

### DIMENSIONS

Height: 3100 / 3600 / 4100 mm  
 Post: Ø121 mm  
 Lamp housing: Ø120 mm. Height 610 mm  
 Weight: 38 / 42 / 46 kg

### LUMINOUS FLUX

Luminous efficacy: 122,5 Lm/W  
 Lumen, 80 Ra: 3000K: >3308Lm, 4000K: >3638Lm

### LIGHT SOURCE

LED type: Bridgelux VERO 29 SE series  
 Operational life: >100.000 hours at Ta 25° C. L80B10  
 Total consumption: Default 25W (max 27W)  
 Colour temperature: 3000K, 4000K  
 Colour rendering: CRI >80  
 Colour accuracy: 3 steps SDCM

### DRIVER

Driver type: Philips Xitanium  
 Operational life: >100.000 hours  
 Surge protection: >10 kV  
 Control: Compatible with Dynadimmer, 1-10V by default. Compatible with DALI as optional extra.

### INSTALLATION

For embedding or flange mounting

### CONNECTION

3 cables max 5 x 10 mm<sup>2</sup>. Connection box and fuse are included

### CLASSIFICATION

IP56, IK10, Insulation safety class II