


SOMBRERO L805



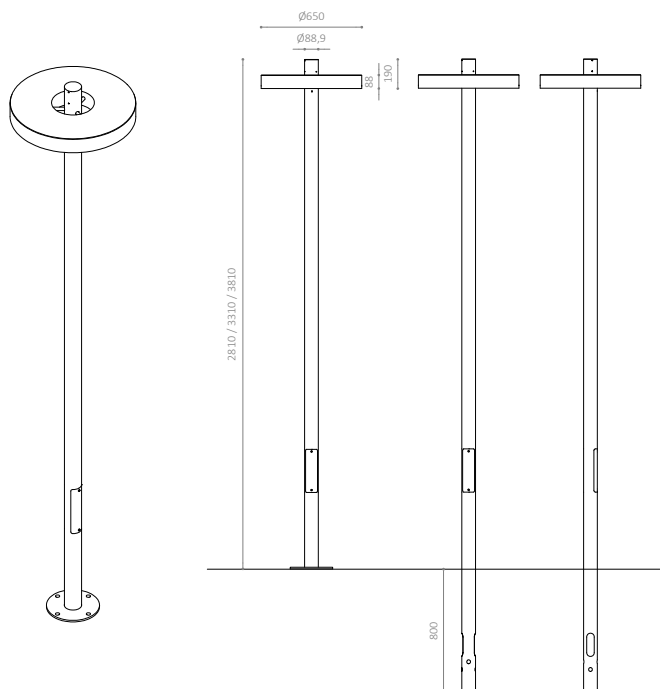

## SOMBRERO L805 - POST LIGHT

DESIGN: CUBO ARKITEKTER

### LIGHT DISTRIBUTION

Direct and rotationally symmetrical distribution of light

### MATERIALS

**Lamp housing:** Hot-dip galvanised steel or powder-coated, hot-dip galvanised steel

**Shade:** Impact resistant polycarbonate. Satiné-Blend. LED-optimised

**Post:** Hot-dip galvanised steel or powder-coated, hot-dip galvanised steel

### DIMENSIONS

Height: 2860 / 3310 / 3810 mm  
 Post: Ø 88,9 mm  
 Lamp housing: Ø 650 mm. Depth 190 mm  
 Weight: 40 / 44 / 48 kg

### LUMINOUS FLUX

Luminous efficacy: >100 Lm/W  
 Lumen, 80 Ra: 3000K: 2700-5300LM.  
 4000K: 2835-5565LM

### LIGHT SOURCE

LED type: Custom Lampas design  
 Operational life: >100.000 hours v/Ta 25° C. L80B10  
 Total consumption: Standard 34W (27-53W)  
 Colour temperature: 3000K, 4000K  
 Colour rendering: CRI>80  
 Colour accuracy: 3 steps SDCM

### DRIVER

Driver type: Philips Xitanium  
 Operational life: >100.000 hours  
 Surge protection: >10 kV  
 Control: Compatible with Dynadimmer, 1-10V by default. Compatible with DALI, Zhaga book 18 as optional extra.

### INSTALLATION

Embedding or flange mounting

### CONNECTION

3 cables max 5 x 10 mm². Connection box and fuse are included

### CLASSIFICATION

IP56, IK10, Insulation safety class II

### CERTIFICATIONS

SOMBRERO L805 is Dark Sky Approved by DarkSky International. 3000k or lower must be selected to meet the DarkSky International certification criteria.

Lampas



Certified by DarkSky.org

www.lampas.com