


BALLO L808



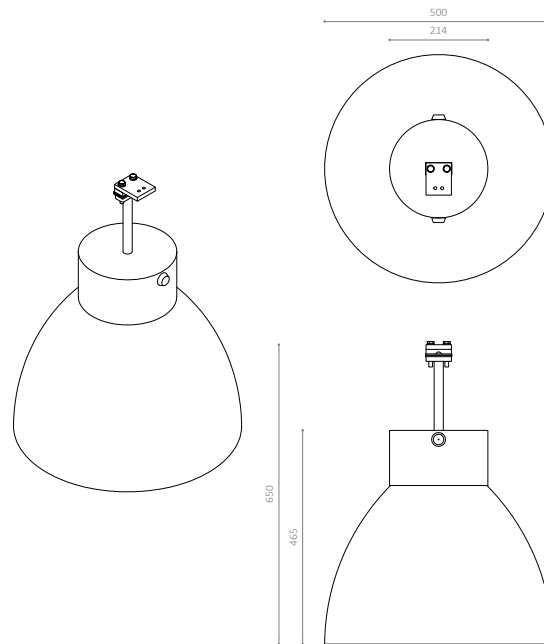

BALLO L808 - CATENARY LUMINAIRE

DESIGN: CUBO ARKITEKTER

LIGHT DISTRIBUTION

Direct, symmetrical or asymmetrical light distribution. Possibility of project adapted light distribution via a wide selection of light distribution lenses.

MATERIALS

Lamp housing: Lampshade in impact resistant opal white polycarbonate. UV resistant
Shade: Acrylic satiné. UV resistant

DIMENSIONS

Lamp housing: Ø500 mm. H: 650 mm
Weight: 10,9 kg

LUMINOUS FLUX

Luminous efficacy: 115,7 Lm/W @3000K, 80Ra
Lumen: >6016Lm @3000K, 80Ra

LIGHT SOURCE

LED type: Philips Fortimo FastFlex
Operational life: >120.000 hours at Ta 25° C. L80B10
Total consumption: Standard 24W (max 53W)
Colour temperature: 2200K, 2700K, 3000K, 4000K
Colour rendering: CRI >80 (Std.), CRI >70 (Opt.)
Colour accuracy: 5 steps SDCM

DRIVER

Driver type: Philips Xitanium
Operational life: >100.000 hours
Surge protection: >10 kV
Control: Compatible with Dynadimmer, 1-10V by default. Compatible with DALI, Zhaga book 18 as optional extra.

INSTALLATION

For wire installation

CONNECTION

Supplied with 2M double-sheathed cable 1 x 0.75 mm² mrk.L and 2M cable 1 x 0.75 mm² mrk.N. Other connection possibilities available

CLASSIFICATION

IP54, IK08, Insulation safety class II