


ADDO L95



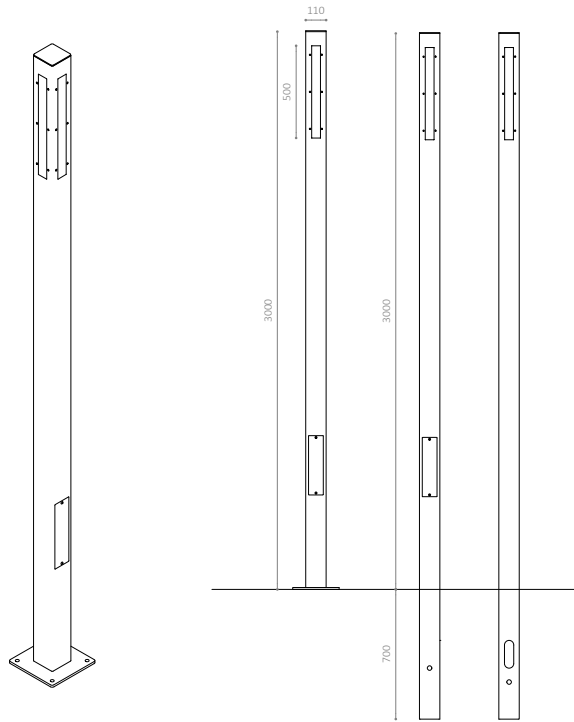

ADDO L95 – POST LIGHT

DESIGN: FRIIS & MOLTKE DESIGN

LIGHT DISTRIBUTION

Direct distribution with 1, 2, 3 or 4 light openings.

MATERIALS

Post: Hot-dip galvanised steel or powder coated, hot-dip galvanised steel

Top: Powder coated aluminium

Shade: Clear plexiglass with white aluminium grille.
UV resistant

DIMENSIONS

Height: 3000 mm
Post: 110 x 110 mm
Weight: 30 kg

LUMINOUS FLUX

Luminous efficacy: 36 Lm/W
Lumen, 80 Ra: 3000K: 432-1440 LM
4000K: 454-1512 LM

LIGHT SOURCE

LED type: Philips Fortimo LEDstrip gen5
Operational life: >70.000 hours v/Ta max 25° C.
L80B10

Total consumption: Default with X number of light openings:
1: 20W (13-29W),
2: 28W (12-40W),
3: 36W (12-40W),
4: 40W (12-40W)

Colour temperature: 3000K, 4000K
Colour rendering: CRI>80
Colour accuracy: 3 steps SDCM

DRIVER

Driver type: Philips Xitanium
Operational life: >100.000 hours
Surge protection: >10 kV
Control: Compatible with Dynadimmer, 1-10V by default. Compatible with DALI as optional extra.

INSTALLATION

For casting or flange mounting

CONNECTION

3 cables max 5 x 10 mm². Connection box and fuse are included

CLASSIFICATION

IP56, IK10, Insulation safety class II