ADDO L95 MINI

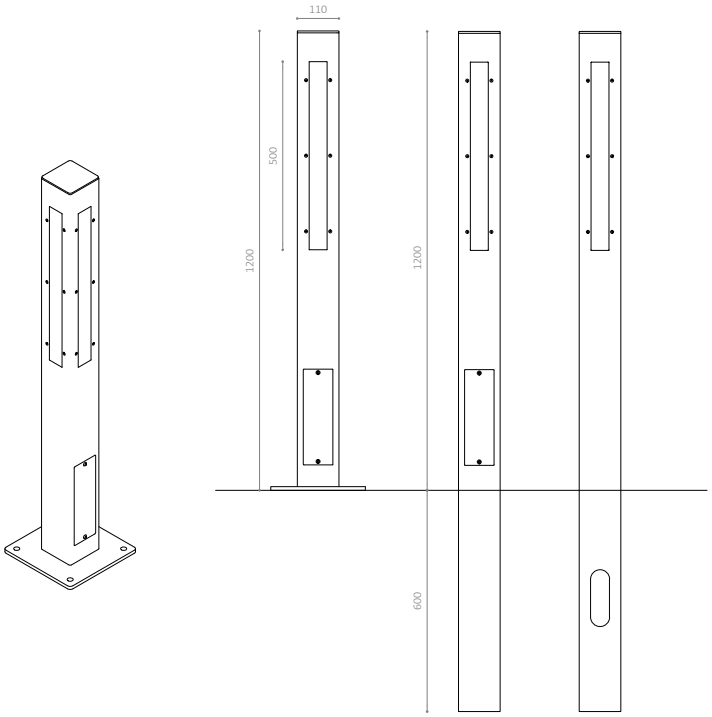

ADDO L95 MINI - BOLLARD LIGHT

DESIGN: FRIIS & MOLTKE DESIGN

LIGHT DISTRIBUTION
Direct, downward light distribution. 1, 2, 3 or 4 light openings.

MATERIALS
Post: Hot-dip galvanised steel or powder coated, hot-dip galvanised steel
Top: Powder coated aluminium
Shade: Clear acrylic. UV resistant

DIMENSIONS

Height:	1200 mm
Post:	110 x 110 mm
Weight:	18,8 - 19,4 kg

LUMINOUS FLUX

Luminous efficacy:	L95-1: 32,6 Lm/W. L95-2: 35,9 Lm/W @3000K, 80Ra
Lumen:	L95-1: >946Lm. L95-2: >1436Lm @3000K, 80Ra

LIGHT SOURCE

LED type:	Philips Fortimo LEDstrip gen5
Operational life:	>70.000 hours at Ta 25° C. L80B10
Total consumption:	L95-1: Standard 20W (max 29W) L95-2: Standard 28W (max 40W) L95-3: Standard 36W (max 40W) L95-4: Standard 40W (max 40W)
Colour temperature:	3000K, 4000K
Colour rendering:	CRI >80 (Std.), CRI>90 (Opt.)
Colour accuracy:	3 steps SDCM

DRIVER

Driver type:	Philips Xitanium
Operational life:	>100.000 hours
Surge protection:	>10 kV
Control:	Compatible with Dynadimmer, 1-10V by default. Compatible with DALI as optional extra.

INSTALLATION
For casting or flange mounting

CONNECTION
3 cables max 5 x 10 mm². Connection box and fuse are included

CLASSIFICATION
IP56, IK10, Insulation safety class II

Available as 3D in Archicad BIM library

Lampas

CE