


PIN L305



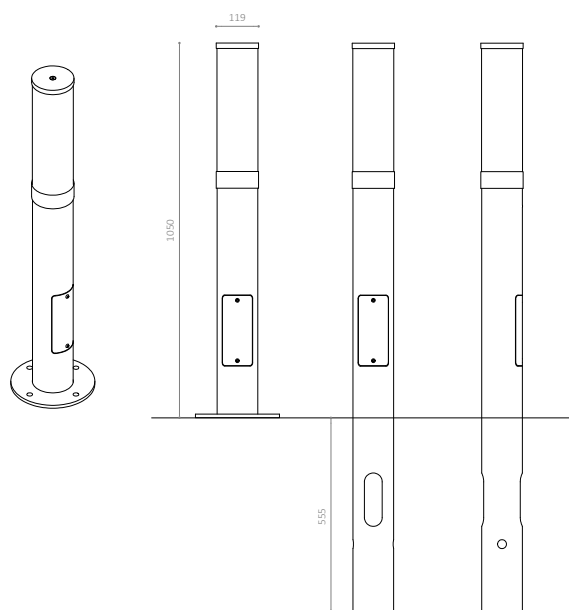

PIN L305 - BOLLARD LIGHT

DESIGN: LUPLAU POULSEN ARKITEKTER

LIGHT DISTRIBUTION

Direct and rotationally symmetrical light distribution. Perforated half shade gives an asymmetrical light distribution (optional extra)

MATERIALS

Lamp housing: Lamp base and top in natural anodized or powder coated aluminum. Perforated half shade in hot-dip galvanised steel or powder coated, hot-dip galvanised steel

Shade: Satiné impact resistant acrylic. UV resistant

Post: Hot-dip galvanised steel or powder coated, hot-dip galvanised steel

DIMENSIONS

Height: 1060 mm
 Post: Ø114,3 mm
 Lamp housing: Ø119 mm. Height 360 mm
 Weight: 19 kg

LUMINOUS FLUX

Luminous efficacy: 96,4 Lm/W
 Lumen, 80 Ra: 3000K: >1446Lm, 4000K: >1591Lm

LIGHT SOURCE

LED type: LED board 380mm
 Operational life: >50.000 hours at Ta 25° C. L80B10
 Total consumption: Default 11W (max 15W)
 Colour temperature: 3000K, 4000K
 Colour rendering: CRI >80
 Colour accuracy: 3 steps SDCM

DRIVER

Driver type: Philips Xitanium
 Operational life: >100.000 hours
 Surge protection: >10 kV
 Control: Compatible with Dynadimmer, 1-10V by default. Compatible with DALI as optional extra

INSTALLATION

Embedding or flange mounting

CONNECTION

2 cables max 5 x 6 mm². Connection box and fuse are included

CLASSIFICATION

IP56, IK10, Insulation safety class II